


RHODEN[®]

Quality. Reliability. Consistency.

Straight Warp Belt

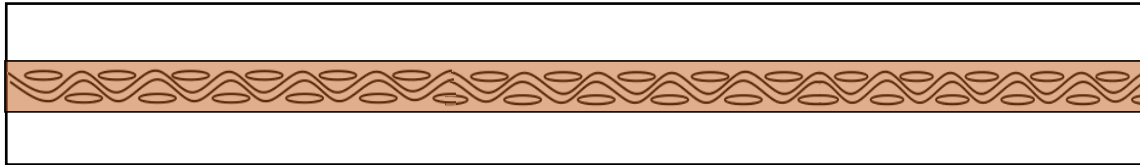

Standard Specifications:	Min. Breaking Strength (PIW)	Max. Operating tension (PIW)	Safety Factor
SW400/1P	> 2284	22.8	10
SW500/1P	> 2855	28.5	10
SW630/1P	> 3597	35.9	10
SW800/1P	> 4568	45.6	10
SW1000/2P	> 5710	57.1	10
SW1250/2P	> 7137	71.3	10
SW1600/2P	> 9136	91.3	10

Key characteristics:

- ✓ High impact resistance
- ✓ High tear resistance
- ✓ High tensile strength per kilogram
- ✓ Decreased bulkiness
- ✓ Lower elongation and stretch

Cross-section of SW fabric

