


Straight Warp Belt

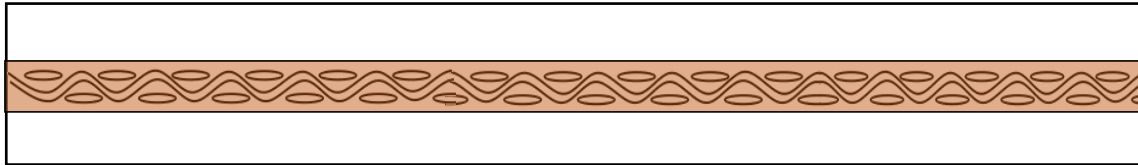

Standard Specifications:	Min. Breaking Strength (PIW)	Max. Operating tension (PIW)	Safety Factor
SW400/1P	> 400	40	10
SW500/1P	> 500	50	10
SW630/1P	> 630	63	10
SW800/1P	> 800	80	10
SW1000/2P	> 1000	100	10
SW1250/2P	> 1250	125	10
SW1600/2P	> 1600	160	10

Key characteristics:

- ✓ High impact resistance
- ✓ High tear resistance
- ✓ High tensile strength per kilogram
- ✓ Decreased bulkiness
- ✓ Lower elongation and stretch

Cross-section of SW fabric

